


KONICA MINOLTA Bizhub 25e

Viteza A4: 25 ppm alb-negru
Formate hartie: A6-A4 si formate personalizate
Capacitate de pana la 2.100 coli in pana la 5 tavii
Alimentator automat de documente reverse
Panou de comanda monocrom, tactil de 5.7 inch

Sisteme de operare

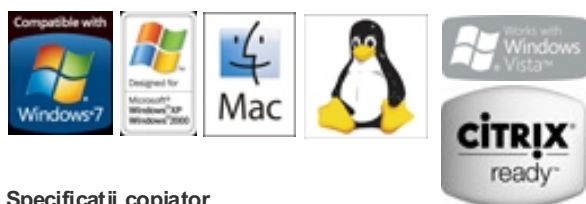

Specificatii copiator

Proces copiere	Copiere LED electrostatic, mono component
Sistem toner	Toner polimerizat
Viteza copiere/printare A4 alb negru	Pana la 25 ppm
Viteza duplex A4 alb negru	Pana la 10 ppm
Prima pagina copiată/printată alb negru	5 sec.
Timpul de incalzire	Aprox. 12 sec. (1)
Rezolutie copiere	600 x 600 dpi
Gradatii	256 gradatii
Copiere multipla	1-999 pagini
Format documente originale	Max. A4
Marire-micsorare	25-400 % in pasi de 1%
Functii copiere	Copiere duplex, sortare electronica, rotire copie, 2in1, 4in1, copiere act de identitate, setari dimensiuni particularizate

Specificatii imprimanta

Rezolutie printare	600 x 600 dpi
Procesor	366 MHz
Limbaje printare	GDI PCL 5e/XL PostScript 3 (optional) Printare directa PDF (optional) Printare coduri de bare si fonturi OCR (optional)

Sisteme operare	Windows XP (32/64) Windows VISTA (32/64) Windows 7 (32/64) Windows 8 (32/64) Windows Server 2003/2008 (32/64) 2008 R2 (64) Windows Server 2012 (64) Macintosh OS X 10.x Unix, Linux, Citrix SAP AS/400
-----------------	--



Imaginea este cu titlu de prezentare

Fonturi printare	80 PCL Latin 136 PostScript 3 Emulation Latin (optional) 32 Barcode/OCR (optional)
Functii printare	Printare duplex, inserare coperta, sortare electronica, ajustare densitate, mod economisire toner, n-up, watermark (doar PCL, PostScript 3), printare securizata

Specificatii scanner

Viteza scanare color	Pana la 27 opm
Viteza scanare alb negru	Pana la 40 opm

Rezolutie scanare	Max : 600 x 600 dpi
Moduri scanare	Scan-to-eMail Scan-to-SMB Scan-to-FTP Scan-to-USB TWAIN local/retea

Formate fisier	PDF, PDF criptat, TIFF, JPEG
Destinatii scanare	1,030 (simplu + grup); suport LDAP

Specificatii fax

Standard fax	Super G3
Transmisie fax	Analog; PC-Fax; i-Fax
Rezolutie fax	Max.: 406 x 392 dpi
Compresie fax	MH; MR; MMR; JBIG
Modem fax	33.6 Kbps
Destinatii fax	1.030
Functii fax	Transmisie intarziata, fax forwarding automat

Specificatii sistem

Memorie sistem standard	512 MB + 128 MB SD card
Interfete standard	10-Base-T/100-Base-TX; USB 2.0
Protocoale de retea	TCP/IP (IPv4, IPv6); IPP, SNMP, HTTP, HTTPS
Tipuri frame-uri	Ethernet II

Alimentator automat documente	Pana la 80 originale; A5-A4; 35-128 g/m ² Alimentator automat de documente duplex	Volum copiere/printare maxim (lunar)	Rec.: 5,000 pagini; Max.: 10,000 pagini
Format hartie	A6-A4, dimensiuni hartie particularizate (90-216 x 140-356 mm)	Durata viata toner Black	Pana la 20,000 pagini
Greutate hartie	60-160 g/m ²	Consum energie	220-240 V / 50/60 Hz Mai putin de 1.09 kW (sistem)
Capacitate alimentare hartie	Standard: 600; Max.: 2,100 coli	Dimensiuni sistem (Lxlxh)	520 x 513 x 509
Casete hartie standard	Caseta 1: 500 coli, A5-A4, 60-90 g/m ² Alimentare manuala (bypass): 100 coli, A6-A4, dimensiuni hartie particularizate (90-216 x 140-356 mm), 60-160 g/m ²	Greutate sistem	Aprox. 24.1 kg
Casete hartie optional	Casetele 3 + 4: 500 coli fiecare, A5-A4, 60-90 g/m ²	Functii sistem	
Duplex automat	A6-A4; 60-90 g/m ²	Securitate	Blocare adresa Mac; blocare adresa IP; SSL; HTTPS; PDF criptat; autentificare utilizator; printare securizata
Capacitate iesire (cu finisher)	Std.: 250 coli Max.: 350 coli (incluzand separatorul de joburi extern optional)	Contorizare	Pana la 100 conturi de utilizator; suport Active Directory 2003; definire acces la functiile echipamentului
		Software	PageScope Net Care Device Manager